


LMR-Series

Mirror Rotate Controls

PRODUCT WEBPAGE

request sample, configure part

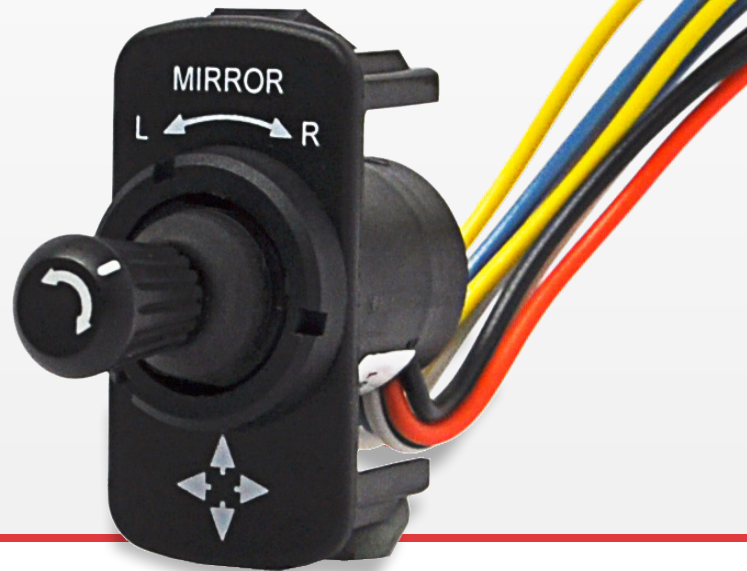

The LMR-Series provides the means to control one or two mirrors and up to four separate motors from one easy to operate joy stick control. When used in conjunction with our dimmer control and wiper/washer control, Carling Technologies provides a solution to most any dashboard control need within the Transportation market.

Multi	.5-1	14-28
Pole	Amps	VDC

Typical Applications

- On/Off-Highway Equipment
- Agricultural Equipment
- Construction Equipment

Tech Specs

Actuator

4 axis joy stick style

Electrical

1A 14V; .5A 28V

Sealing

Internal boot and potted wire leads protect critical component from dust and moisture

Termination ¹

9" wire leads with Delphi-Packard connector #12047886 3

Mechanism

Sliding contacts in conjunction with a circuit board

Notes:
¹ Compatible with Delphi-Packard #12045688. Delphi-Packard is a registered trademark of Delphi-Packard Electrical Systems, Warren, Ohio.

Ordering Scheme

Sample
Part Number **LMR - 01 - 1**

Selection 1 2 3

1. SERIES

LMR 2 position (left, right), 4 axis (N,S,E,W) with wire leads

2. ACTUATOR /BRACKET COLOR

01 Black

3. LEGEND


2 no legend
1 2 arrows symbol (left, right)
2 4 arrows symbol (front, back and left, right)

Notes:
¹ All legends are imprinted in white. All product supplied with Mirror L & R legend on top of bracket and detent and directional legend on actuator.

[Configure Complete Part Number >](#)

Dimensional Specs

inches [millimeters]

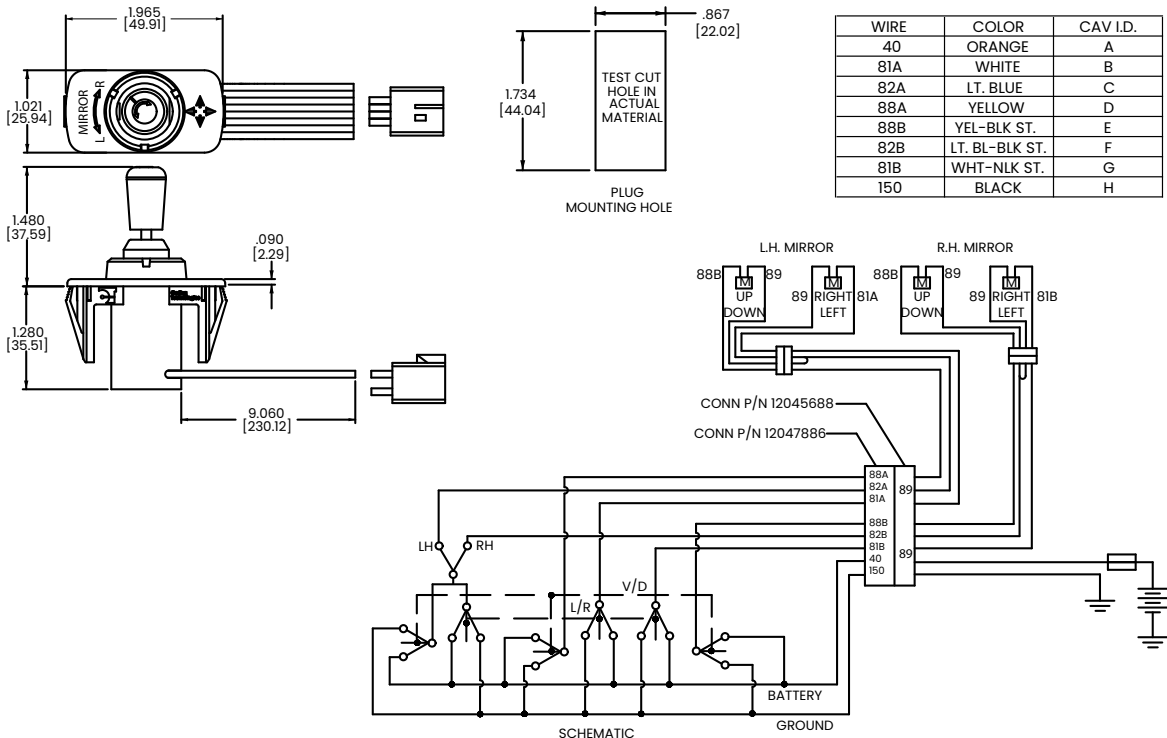

CS Series

4-way Adjustable Direction Switch



Features/Benefits

- ***Designed for mirror control***
- ***Wire harness and connector easy to customize***
- ***4-way adjustable directions***

Typical Applications

- **Automotive**
- **Industrial**

Specifications

CONTACT RATING: 0.2 A @ 12 VDC

OPERATING LIFE: 10,000 cycles

INSULATION RESISTANCE: 10 M Ω min. @ 500 VDC

DIELECTRIC STRENGTH: 500 V AC

OPERATING TEMPERATURE: -40°C to +90°C

OPERATING FORCE: L- OFF, R-OFF; 200 ±100 gf

OFF-L, OFF-R; 400 ± 200 gf

4 Direction; 500 ± 200 gf

Materials

KNOB: ABS

COVER: ABS

TERMINAL: Brass, tin plated


NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

How To Order

Part number list is shown below.

Part Number (Part Description)	Product Details
CS-41001-E	4 directions switch with selector slide switch

PART NUMBER	PACKAGING
CS-41001-E	256 pieces

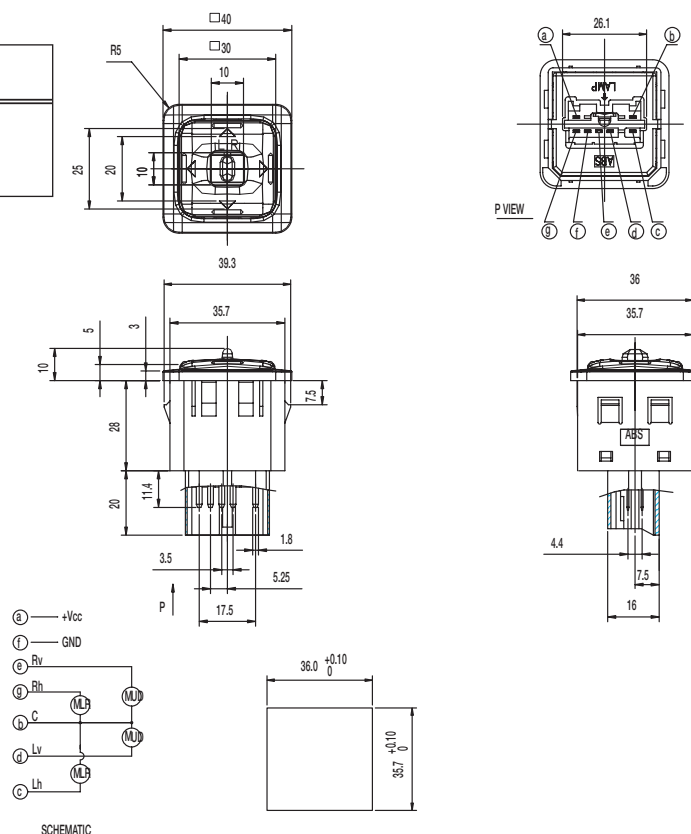

Dimensions are shown: mm
Specifications and dimensions subject to change