



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.

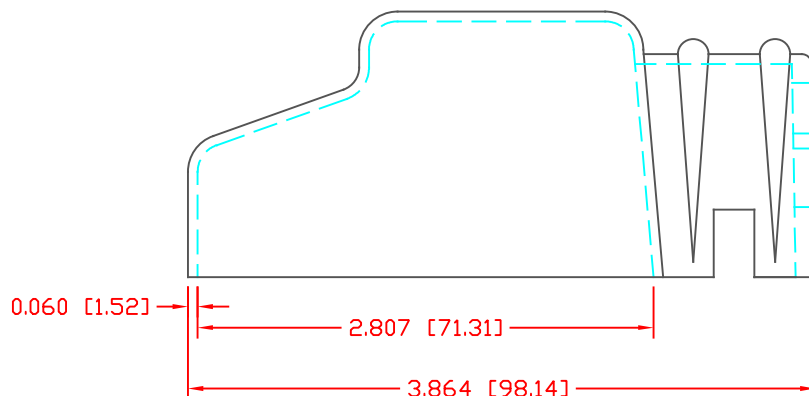

3/0 (.750" ϕ)
N8

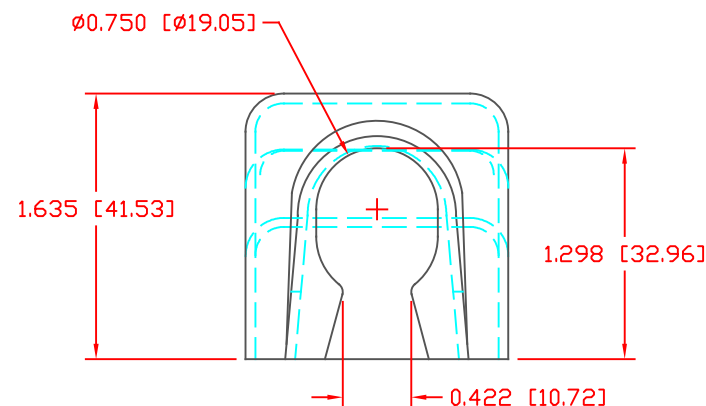

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ± 0.030 " [± 0.8 mm]
HARDWARE ITEMS: ± 0.010 " [± 0.25 mm]

VTE PART NO: 1101950102
MATERIAL: PVC
VENDOR PART NO: 9812-95-RED 683
SHORE DUROMETER: "A" 10 SEC. 95
SPECIFIC GRAVITY: 1.49
ULT. ELONGATION %: 200
MELTING TEMP: 345-365 F [174-185 C]
Tensile Strength PSI: 2100
Dielectric Strength, v./mil: 438
U.L. Rating: V2

DO NOT SCALE



		VTE Incorporated	
		5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF:	DATE:	DRN BY:	BRH
CUSTOMER DIMS	24MAR10	CHK'D BY:	BRH
WEIGHT: .060 LBS [27.3 g]			
TITLE: BATTERY TERMINAL INSULATOR			
MATERIAL: PVC		PART NO.	
COLOR: RED		455N8V02	
DRG CLASS			

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.



3/0 (.750" ϕ)
N8

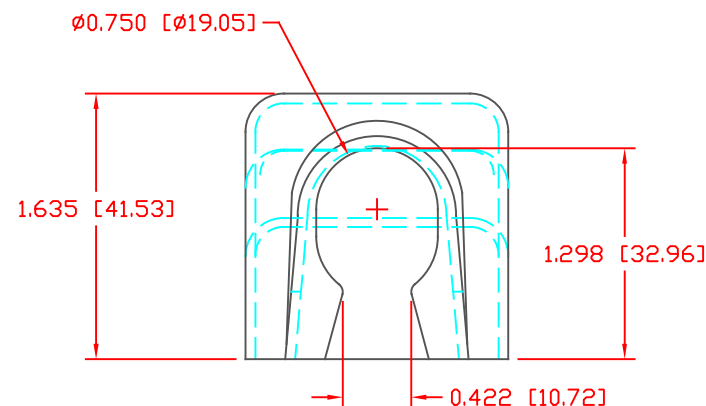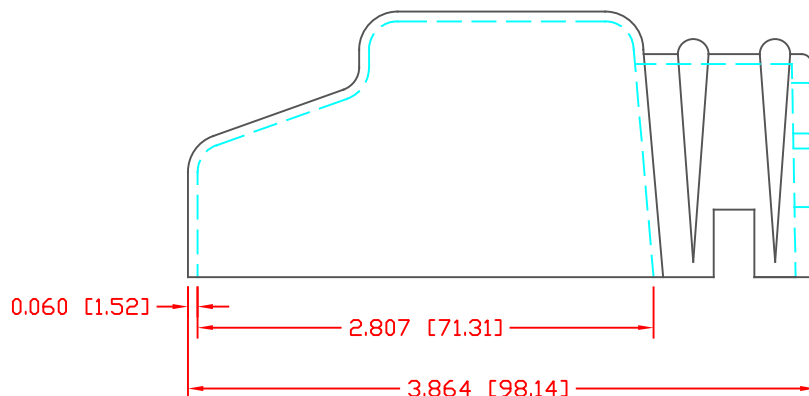

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ± 0.030 " [± 0.8 mm]
HARDWARE ITEMS: ± 0.010 " [± 0.25 mm]

VTE PART NO: 1101950114
MATERIAL: PVC
VENDOR PART NO: 9812-95-BLACK
SHORE DUROMETER: "A" 10 SEC. 95
SPECIFIC GRAVITY: 1.5
ULT. ELONGATION %: 200
MELTING TEMP: 345-365 F [174-185 C]
Tensile Strength PSI: 2100
Dielectric Strength, v./mil: 384
U.L. Rating: V2

DO NOT SCALE

		VTE Incorporated	
		5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF:	DATE:	DRN BY:	BRH
CUSTOMER DIMS	24MAR10	CHK'D BY:	BRH
TITLE:		BATTERY TERMINAL INSULATOR	
MATERIAL: PVC		PART NO.	
COLOR: BLACK		455N8V14	
DRG CLASS			
		WEIGHT: .060 LBS [27.3 g]	